


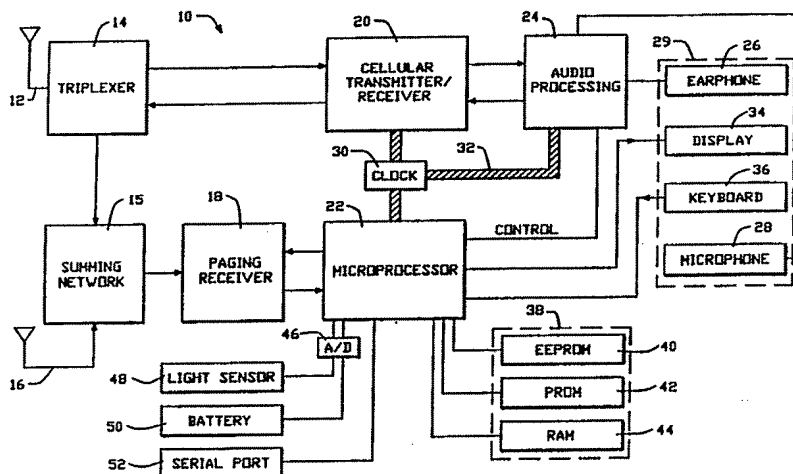

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>H04Q 7/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 92/09178</b>  <b>(43) International Publication Date:</b> 29 May 1992 (29.05.92)
<b>(21) International Application Number:</b> PCT/US91/08517 <b>(22) International Filing Date:</b> 14 November 1991 (14.11.91) <b>(30) Priority data:</b> 614,302 16 November 1990 (16.11.90) US <b>(71) Applicant:</b> UNIVERSAL CELLULAR, INC. [US/US]; 3365 East Miraloma Boulevard, Anaheim, CA 92806 (US). <b>(72) Inventors:</b> WOHL, James, P. ; 1436 Benedict Canyon Drive, Beverly Hills, CA 90210 (US). NAUGLER, W., Edward, Jr. ; 4432 Hazlenut Avenue, Seal Beach, CA 90740 (US). HENDERSHOT, James ; 5129 Avenida de Amor, Yorba Linda, CA 92686 (US). LLOYD, Graham, P. ; 3019 Ingersoll Place, Fremont, CA 94538 (US). ADAMS, Erich, B. ; 4174 El Dorado Street, Riverside, CA 92501 (US).		<b>(74) Agents:</b> GALLIANI, William, S. et al.; Flehr, Hohbach, Test, Albritton & Herbert, 4 Embarcadero Center, Suite 3400, San Francisco, CA 94111-4187 (US).  <b>(81) Designated States:</b> AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GB (European patent), GR (European patent), HU, IT (European patent), JP, KR, LU (European patent), NL (European patent), NO, SE (European patent), SU+.

**Published***With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.***(54) Title:** CELLULAR TELEPHONE WITH PAGER**(57) Abstract**

A cellular/pager includes a cellular antenna (12) for receiving UHF cellular and paging signals. The cellular/pager also includes a VHF paging antenna (16). Every paging signal is sent to a paging receiver (18). The paging receiver (18) uses the same circuitry to process either the UHF or VHF page. This is accomplished by setting a voltage controlled oscillator (VCO) (106) to one of two frequency ranges. The chosen frequency is either added or subtracted to the incoming signal in order to match a constant intermediate frequency. The resultant signal is demodulated and a bit rate is selected by a decoder (110), under the control of a microprocessor (22). Cellular signals are sent to a cellular block (20). Cellular location information is utilized by the cellular/pager to form an internally updated roaming pager. The paging service then knows the location of the paging receiver, consequently the paging service can direct the pager to await for a page at a single frequency, thereby eliminating frequency scanning by the pager of manual updates by the user.

# + DESIGNATIONS OF "SU"

Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

## *FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland			SN	Senegal
CI	Côte d'Ivoire	KR	Republic of Korea	SU <sup>+</sup>	Soviet Union
CM	Cameroon	LI	Liechtenstein	TD	Chad
CS	Czechoslovakia	LK	Sri Lanka	TG	Togo
DE	Germany	LU	Luxembourg	US	United States of America
DK	Denmark	MC	Monaco		

## CELLULAR TELEPHONE WITH PAGER

### Technical Field

The present invention relates to an improved cellular telephone. More particularly, it relates to a compact apparatus which includes a cellular telephone and a mobile pager; the apparatus simultaneously utilizes features of the mobile pager and cellular telephone.

### Background Art

Cellular telephones are well known in the art. Similarly, mobile pagers are well known in the art. While each art has advanced to a sophisticated level, there are still a number of shortcomings associated with each.

In relation to mobile pagers, a number of problems may arise. First, while a mobile paging unit may be reached almost anywhere in the country, that is obtain a signal, the pager itself does not know where it is located. Thus, to insure that it will be reached, the pager scans multiple frequencies to search for a signal. This scanning of multiple frequencies consumes excess energy.

Mobile pagers with national access capability operate at approximately 150 MHz. However, this frequency range is becoming overcrowded, as a result, pagers are beginning to utilize a 931 MHz frequency. These two frequency ranges are in separate bands and therefore require separate processing circuitry. Thus, if a pager is to utilize both bands, it requires additional circuitry which makes the pager more expensive and bulky.

-2-

Another problem related to mobile pagers relates to the inability of a user to identify the paging party by merely looking at the telephone number on the display.

5 There are also a number of problems associated with cellular telephone technology. First, cellular telephones are difficult to program to achieve particularized functions. Next, they do not provide on-line help.

10 To this juncture, mobile pagers and cellular telephones have been utilized concurrently, but never in a compact unitary package. A difficulty preventing such a combination relates to signal processing of the two types of signals. Cellular telephones operate at 800 to 900 MHz while mobile pagers operate at a frequency as low as 150 MHz.

15

#### Objects and Summary of the Invention

It is a general object of the present invention to combine cellular telephone and mobile pager assemblies into a compact unitary apparatus.

20 It is a more particular object of the present invention to provide means for processing both cellular and mobile pager signals in the same apparatus.

It is another object of the present invention to provide a mobile pager which is cognizant of its physical location, thereby eliminating scanning, thus serving to conserve energy.

25 It is another object of the present invention to provide a pager which utilizes one set of circuitry to process the 150 MHz and 931 MHz paging frequencies.

30 It is still another object of the present invention to provide a pager which includes text information which may be used in conjunction with the number provided by an incoming page.

35 It is a more particular object of the present invention to provide a mobile pager and cellular telephone which can automatically dial the actual number received from a mobile pager regardless of the area code from which the cellular telephone is dialing.

-3-

It is yet another object of the present invention to provide a cellular telephone which may be programmed utilizing an interface with a personal computer.

5 Another object of the present invention is to provide a cellular telephone with on-line help.

These and other objects are achieved by a compact and unitary cellular/pager. The cellular/pager includes a cellular antenna for receiving UHF cellular and paging signals. The cellular/pager also includes a VHF paging antenna. Every paging signal is sent to a paging receiver. The paging receiver uses the same circuitry to process either the UHF or VHF page. This is accomplished by setting a voltage controlled oscillator (VCO) to one of two frequency ranges. The chosen frequency is either added or subtracted to the incoming signal in order to match a constant intermediate frequency. The resultant signal is demodulated and a bit rate is selected by a decoder, under the control of a microprocessor. Therefore, the paging receiver can choose a band, a channel and a bit rate. Cellular signals are sent to a cellular block which includes a transmit section with two synthesizers controlled by a single set of instructions from the microprocessor. Cellular location information is utilized by the cellular/pager to form an internally updated roaming pager. That is, the cellular location information is automatically conveyed by the cellular block, under the control of the microprocessor, to a paging service. The paging service then knows the location of the paging receiver, consequently the paging service can direct the pager to await for a page at a single frequency, thereby eliminating frequency scanning by the pager and manual updates by the user. The cellular/pager includes a serial port to facilitate data entry. It also includes context-sensitive on-line help for the user of the cellular/pager.

10  
15  
20  
25  
30  
35

#### Brief Description of Drawings

-4-

Other objects and advantages of the invention will become apparent upon reading the following detailed description and upon reference to the drawings, in which:

5       FIGURE 1 is a block diagram of a preferred embodiment of a cellular telephone with a pager, in accordance with the present invention.

10       Figure 2 is a perspective view of a cellular telephone with a pager in a compact unitary housing in accordance with the present invention.

FIGURE 3 is a detailed block diagram of the paging receiver of Figure 1.

15       Figure 4 is a detailed block diagram of the cellular transmitter/receiver block of Figure 1.

#### Best Mode for Carrying Out the Invention

20       Turning now to the drawings, wherein like components are designated by like reference numerals in the various figures, attention is initially directed to Figure 1. Depicted therein, in block format, is a cellular telephone with a pager (cellular/pager) 10. The cellular/pager 10 includes a cellular/pager antenna 12 which is coupled to a triplexer 14. Triplexer 14 is coupled to summing network 15 and cellular transmitter/receiver block (cellular block) 20. A VHF paging antenna 16 is also coupled to summing network 15. The resultant signal from the summing network 15 is conveyed to paging receiver 18 which communicates with the microprocessor 22.

30       Returning to cellular block 20, signals from cellular block 20 are conveyed to audio processor 24. Audio processor 24 controls the earphone 26 and the microphone 28, which are positioned on the face 29 of the cellular/pager 10. The audio processor 24 is synchronized by clock 30 and I<sup>2</sup>C bus 32 which operates between the cellular block 20 and the microprocessor 22.

35       The microprocessor 22 also controls the display 34 and keyboard 36 on face 29 of the cellular/pager 10. The

-5-

microprocessor also operates in conjunction with memory bank 38, including EEPROM 40, PROM 42, and RAM 44. An analog to digital converter 46 digitizes the analog input from light sensor 48 and battery 50. The microprocessor is also attached to a serial port 52.

Turning to Figure 2, the external portion of cellular/pager 10 is depicted. Specifically, face 29 includes earphone 26, display 34, keypad 36 and microphone 28.

Having provided an overview of the cellular/pager 10 of the present invention, attention focuses upon some of the details of the apparatus. Cellular antenna 12 is connected to triplexer 14. The cellular antenna 12 is used for cellular reception and transmission. However, it is also used to receive pages at 931 MHz.

The triplexer uses a band pass filter to separate the cellular radio transmit signal and another band pass filter to separate its receive signal. As a result, the transmitter and receiver can run simultaneously. This aspect of the triplexer is essentially normal duplexer operation for a two port device.

In order to accommodate the paging signal, the triplexer also employs a third band pass filter to separate the 931 MHz paging signal. Thus, an additional port is involved which potentially upsets the normal operation of the two port duplexer. To prevent such a disruption, the band pass filter for the 931 MHz paging signal has a high impedance, such that power is not shunted into the receivers when the transmitter from cellular block 20 is operating.

Turning now to Figure 3, a detailed block diagram of the paging receiver 18 is provided. The paging receiver 18 can select both its band and its channel. It operates in the 150 to 160 MHz and 931 to 932 Mhz bands. It is difficult to accommodate these two vastly different frequencies. Normally, separate circuitry would be required to process each signal. The additional

-6-

circuitry is expensive, consumes extra energy, and results in a bulkier device.

These problems are solved with the present invention, as one set of circuitry is utilized to process both bands. The signal from summing network 15 is fed to paging receiver 18. As shown in Figure 3, the signal proceeds through low noise amplifier 100, the output is then fed through mixer 108 to intermediate frequency chip 102.

The IF chip 102 is maintained at 470 MHz. To obtain the desired frequencies, the VCO 106, via synthesizer 104, is set to two ranges. The first range is 460 to 470 MHz while the second range is 310 to 320 MHz. If one desires to receive a signal at 930 MHz, the first range is subtracted from the received signal to match the intermediate frequency; that is, the input signal minus the VCO 106 will equal 470 MHz, the setting of the IF chip 102. Conversely, if one desires to receive a signal at 150 MHz, the second range is added to match the intermediate frequency; that is the input signal plus the VCO 106 will equal 470 MHz, as maintained on the IF chip 102.

This configuration has a number of advantages. First, only one local oscillator is required. Next, only one synthesizer is required. Finally, it eliminates the need for an RF switcher that consumes excessive power and space. Thus, one set of circuitry processes signals at both bands, facilitating a compact, unitary package for the cellular/pager 10.

After a range, and thus a band is selected, the signal is demodulated at block 104 and conveyed to decode chip 110.

The POCSAG decoder 110 may be a Phillips PCA 5000T chip. The decoder adjusts for the proper bit rate. The standard bit rate is 512 bits per second. It is desirable to accommodate a rate of 1200 bits per second. Either bit rate may be accommodated by the decoder 110 as directed by the microprocessor 22.



-7-

In sum, the pager receiver 18 of the present invention allows one to select the band (900 or 150 MHz), to select the channel, and the bit rate.

Figure 4 discloses the novel aspects of the cellular transmitter/receiver 20. The cellular block 20 employs a cellular data processor chip; a Phillips UMA 1000 chip is suitable. The receiver section 120 includes a low noise amplifier 150 coupled to the triplexer 14. The amplified signal is mixed with the signal from synthesizer 158 through mixer 152. The signal from the mixer proceeds to band pass filter 154 which isolates a 45 MHz signal. From band pass filter 154, the 45 MHz signal is sent to an intermediate frequency receiver 156 which sends demodulated data over line 157A and a signal strength signal over line 157B.

The transmit section 139 of the cellular data processor 20 includes an additional synthesizer 159. Synthesizer 158 and synthesizer 159 are treated as a single synthesizer by the microprocessor 22, receiving and transmitting identical information through a single lead. When the microprocessor 22 invokes a certain channel, both the receiver 120 and transmitter 130 will be switched. There is no need to communicate with two synthesizers since the microprocessor 22 treats the two synthesizers 158 and 159 as a single synthesizer.

The second synthesizer 159 eliminates the need for signal isolation circuitry between switch 164 and synthesizer 158 when the transmitted signal is modulated. Without this circuitry, the cellular/pager 10 can conserve energy. While energy is saved, additional control is not required from the microprocessor 22, since the microprocessor 22 is essentially communicating with a single synthesizer.

The output from synthesizer 159 runs through switch 164 which turns off the signal when the cellular/pager 10 is not transmitting. Switch 164 is under the control of the microprocessor 22. When the switch 164 is open, the signal runs to amplifier 166 which includes variable

-8-

power control; amplifier 166 is also under the control of the microprocessor 22.

5 The output goes through power sensor 168 which is also coupled to the microprocessor 22, which utilizes a look-up table to insure that the proper voltage level is present. After proceeding through the power sensor, the signal goes to the transmit section of the triplexer 14.

10 The microprocessor serves a number of roles in relation to cellular data processing. It controls the cellular radio transmitter and receiver, it also controls the tuning, power levels, and toggles the transmitter on and off. The microprocessor is also used to determine the proper channel and whether a channel is idle. The microprocessor 22 also sends data out over the transmitter 15 130 to establish a call and to register its location, as is known in the art.

From the cellular processor of Figure 4, the resultant signal is sent to the audio processor 24. The audio processor may be a Phillips NE 5750/5751 audio processor. The audio processor 24 controls the audio processing circuits which process the audio signal in accordance with cellular standards. The Audio processor 24 is coupled to earphone 26 and microphone 28, which are known in the art. The display 34 and keyboard 25 36 on the face 29 of the cellular/pager 10 are also of the type which are known in the art. A suitable display 34 and keyboard 36 are depicted in figure 4. The display 34 and keyboard 36 are coupled to the microprocessor 22.

30 The microprocessor 22 may be a Signetics 80C552 chip. It controls memory bank 38 which includes EEPROM 40. EEPROM 40 may be a (2K x 8) chip. The microprocessor 22 is also coupled to PROM 42 which may be a (64K x 8) chip and RAM 44 which may be a (2K x 8) chip. There is also memory in the microprocessor which contains a program, there is also active memory for storing 35 information such as scratch pad, key stroke, and, active channel information.

-9-

An analog to digital converter 46 permits interface between the microprocessor 22 and light sensor 48 and battery 50.

5       The light sensor 48 may be positioned on the face  
29 of the cellular/pager 10, as seen in Figure 2, to sense  
ambient light. The microprocessor can then be utilized  
to illuminate the keyboard 36 in response to the ambient  
light. The serial port 52 permits an interface with  
10       an external device to allow programming of the  
cellular/pager 10. Thus, in addition to an ability to  
program the cellular/pager from the keypad 36, a separate  
personal computer, with its extended keypad, may be used  
to create a directory or procedures which may be  
15       downloaded from the personal computer, through the serial  
port 52, into the microprocessor 22 and then into memory  
bank 38.

      The timing of the microprocessor 22 is governed by  
clock 30 which communicates with the microprocessor by  
means of I<sup>2</sup>C bus 32; the clock may be a Phillips PCF8573  
20       chip. Preferably, the clock 30 includes a wake up pin  
and includes its own battery. A Phillips PCF8573 chip is  
suitable for this purpose. The I<sup>2</sup>C bus 32 is utilized  
between the clock 30 and cellular data block 20 and audio  
processor 24.

25       The described hardware operates at a number of power  
levels. In the power down mode, all active devices are  
in an inactive state, except for the microprocessor 22  
which maintains a low level power state. In the pager  
mode, the microprocessor 22 is maintained at a higher  
30       power state while the paging receiver 18 is active, thus,  
the pager of the cellular/pager 10 may receive a page.  
In the standby mode the cellular block 20 is active.  
Thus, the cellular receiver 120 is active and the cellular  
transmitter 130 transmits locational information every  
35       few minutes. Finally, in the call-mode, essentially all  
the circuitry is active.

      In the pager mode, a page may be received through  
either the cellular antenna 12 or the paging antenna 16.

-10-

As previously described, the incoming page is processed and reaches the microprocessor 22. The microprocessor 22 may activate an indicator which may be an audible tone or a vibrating mechanism.

5           The microprocessor 22 compares the incoming page to a stored directory of names and telephone numbers. If the directory finds a match for the incoming page number, the information from the directory is conveyed to display 34. This information may include the paging party's name and telephone number, for instance. If after viewing the  
10           directory information on the display 34, the user of the cellular/pager 10 decides to call the displayed number, a button on keypad 36 may be pushed which will cause the information from the directory to be automatically dialed,  
15           in accordance with prior art techniques.

          This automatic dialing will include the area code, thus in urban areas with multiple area codes a user need not worry about remembering the area code of the caller, nor worry about the area code from which the call is being  
20           made. That is, if the cellular/pager is roaming from one area code to the next, the local cell will have this information. The area code in the directory will be utilized as necessary, depending upon the cell from which the call is being made.

25           If a match is not found within the directory, the number is sent to display 34. In this case, if the user desires to dial the displayed number, the number may be dialed manually.

          In the standby mode the cellular block 20 is active  
30           and therefore a cellular phone call may be received. Part of the operation of the cellular block 20 includes intermittent transmissions by the cellular transmitter 130. Based upon these transmissions, the local cell returns to the cellular receiver 120 useful information  
35           defining the location of the cellular/pager 10. This information may be used by the microprocessor 22 and the pager receiver. For instance, once the information defining the location is received, a telephone call may

-11-

be made to the local paging system. The location information received from the cell may be transmitted to the paging system. With this information, the paging system can inform the cellular/pager 10 to await for a page at a specific frequency. Thus, the pager receiver 18 does not have to scan multiple frequencies.

More specifically, in the standby mode, the cellular data block 20 receives and transmits signals. The microprocessor 22 interprets those signals to determine whether it has gone to a different cellular region. Based upon that information, the microprocessor 22 will then direct the cellular data processor 20 to call a 1-800 number and inform the paging system of the cellular/pager's 10 location. The paging system will instruct the cellular/pager 10 to tune to a different frequency, a different path code and different receiver coordinates. Afterwards, the paging system will send out a page to confirm to the cellular/pager 10 that it has in fact executed all of those instructions. All of this activity is invisible to the user.

Thus, by combining the cellular block 20 with the paging receiver 18, the receiver operates more efficiently since it does not have to scan frequencies. Similarly, the user of the pager does not have to continuously call the paging service to provide updated location information -- this is done automatically.

When the cellular/pager 10 is in the standby mode one may invoke on line help. This information is stored in memory bank 38. Depending upon what activity the user is presently doing, the microprocessor 22 fetches the proper help information stored in memory bank 38. Thus, a different help message is provided depending upon what the user is doing. For instance, if the user is storing a phone number, the microprocessor 22 will fetch information regarding storing phone numbers.

Thus, it is apparent that there has been provided, in accordance with the invention, a programmable cellular telephone with a pager which fully satisfies the objects,

-12-

aims, and advantages set forth above. While the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, it is intended to embrace all such alternatives, modifications, and variations as fall within the spirit and scope of the appended claims.

What is Claimed is:

1. An apparatus for receiving VHF and UHF pages, comprising:

(A) means for receiving a VHF signal;

(B) means for receiving a UHF signal;

(C) a single pager circuit, coupled to said means for receiving a VHF signal and said means for receiving a UHF signal, for processing said VHF signal and said UHF signal, said pager circuit including a local oscillator and a mixer, said local oscillator being set to either a first frequency or a second frequency, said first frequency being added to said VHF signal and said second frequency being subtracted from said UHF signal;

(D) means for indicating that a page has been received;

(E) means for displaying paging information; and

(F) a compact housing enclosing (C) through (E).

2. The apparatus of claim 1 wherein said pager circuit also includes a demodulator, a decoder, and a microprocessor, said microprocessor controlling said decoder and said local oscillator, such that said apparatus may select a band, channel and bit rate.

3. The apparatus of claim 1 wherein said apparatus includes a summing network for summing said VHF signal and said UHF signal and sending said summed signal to said pager circuit.

-13-

4. The apparatus of claim 1 wherein said means for receiving a UHF signal includes a triplexer.

5. An apparatus for receiving pages and for receiving and transmitting telephone calls, comprising,

(A) means for receiving a VHF signal;

(B) means for receiving and transmitting a UHF signal;

(C) a microprocessor;

(D) a single pager circuit for processing a page signal within either said VHF signal or said UHF signal, said pager circuit including a local oscillator, controlled by said microprocessor, set to either a first frequency or a second frequency, said first frequency being added to said VHF signal and said second frequency being subtracted from said UHF signal;

(E) means for processing said UHF signal to determine the location of said apparatus whereby said means for receiving and transmitting said UHF signal are utilized to provide said location to a paging system, said paging system providing a UHF signal, received by said means for receiving said UHF signal, defining a single VHF signal for said local oscillator to tune;

(F) means for indicating that a page has been received;

(G) means for displaying paging information; and

(H) a compact housing enclosing (C) through (G).

6. The apparatus of claim 5 wherein said pager circuit also includes a demodulator, a decoder, and a microprocessor, said microprocessor controlling said decoder and said local oscillator, such that said apparatus may select a band, channel and bit rate.

7. The apparatus of claim 5 wherein said apparatus includes a summing network for summing said VHF signal

-14-

and said UHF signal and sending said summed signal to said pager circuit.

5        8. The apparatus of claim 5 wherein said means for receiving a UHF signal includes a triplexer.

10       9. The apparatus of claim 5 wherein said means for receiving and transmitting a UHF signal includes two synthesizers controlled by a single set of instructions from said microprocessor.

10. An apparatus for receiving VHF and UHF pages and for receiving and transmitting telephone calls, comprising:

15       (A) means for receiving a VHF signal;  
      (B) means for receiving and transmitting a UHF signal, said means including a triplexer and a cellular block;

      (C) a microprocessor;  
      (D) a summing network, coupled to said means for receiving said VHF signal and said means for receiving said UHF signal, said summing network summing said VHF signal and said UHF signal;

20       (E) a paging receiver coupled to said summing network, said paging receiver including,  
25       (1) a single circuit for processing said VHF signal and said UHF signal, said circuit including a local oscillator controlled by said microprocessor, said local oscillator being set to either a first frequency or a second frequency, said first frequency being added to said VHF signal and said second frequency being subtracted from  
30       said UHF signal;

      (2) a demodulator;  
      (3) a decoder, said microprocessor controlling said decoder and said local oscillator, such that said  
35       apparatus may select a band, channel and bit rate;

      (F) means for processing and utilizing said UHF signal to determine the location of said apparatus, whereby said means for receiving and transmitting said



-15-

UHF signal are utilized to provide said location to a paging system, said paging system providing a UHF signal, received by said UHF receiver, defining a single VHF signal for said local oscillator to tune;

5 (G) an audio processor coupled to a microphone and an earphone;

(H) a keyboard coupled to said microprocessor;

(I) a display coupled to said microprocessor;

(J) a serial port coupled to said microprocessor;

10 (K) memory coupled to said microprocessor;

(L) a program stored in said memory whereby said microprocessor conveys information from said program on said display; and

(M) a compact housing enclosing (C) through (L).

15

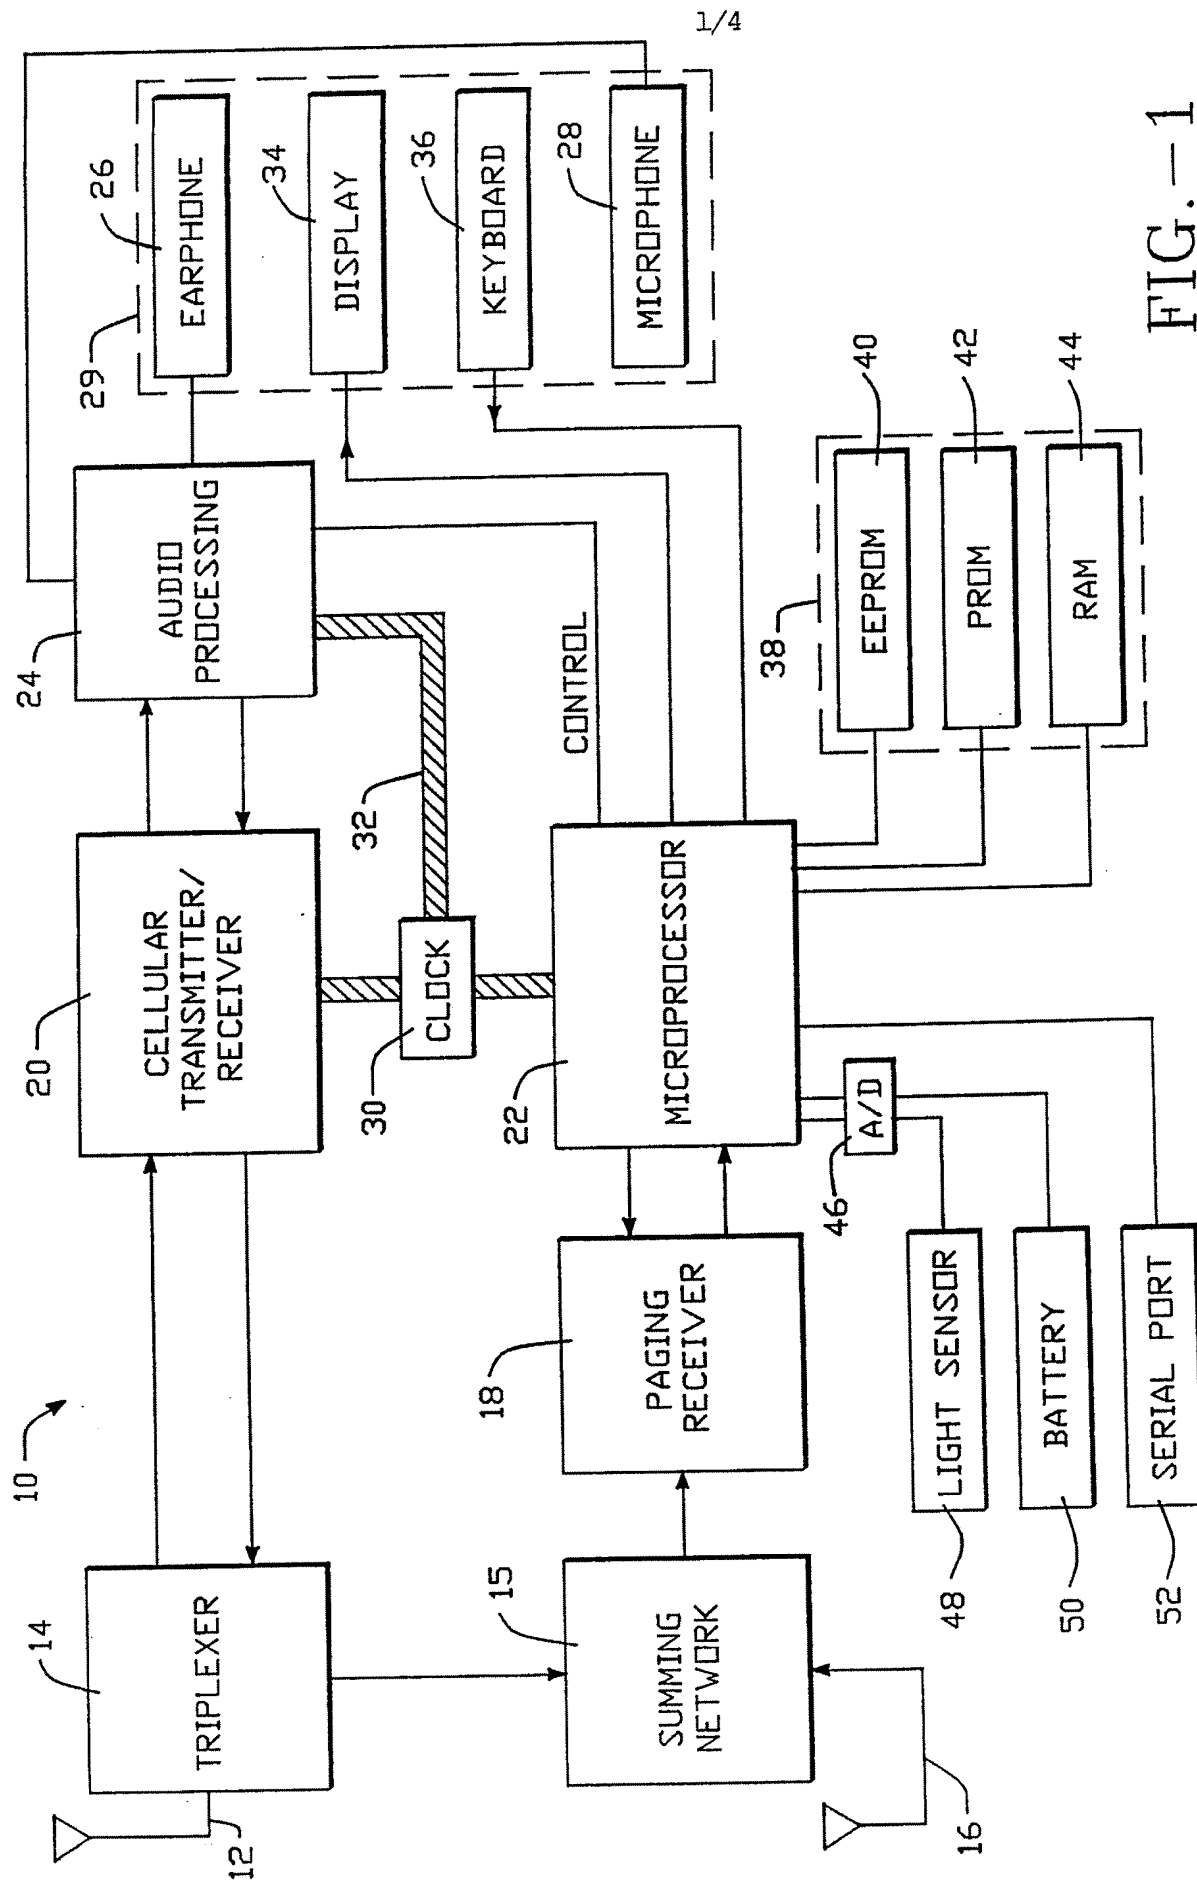


FIG. -1

2/4

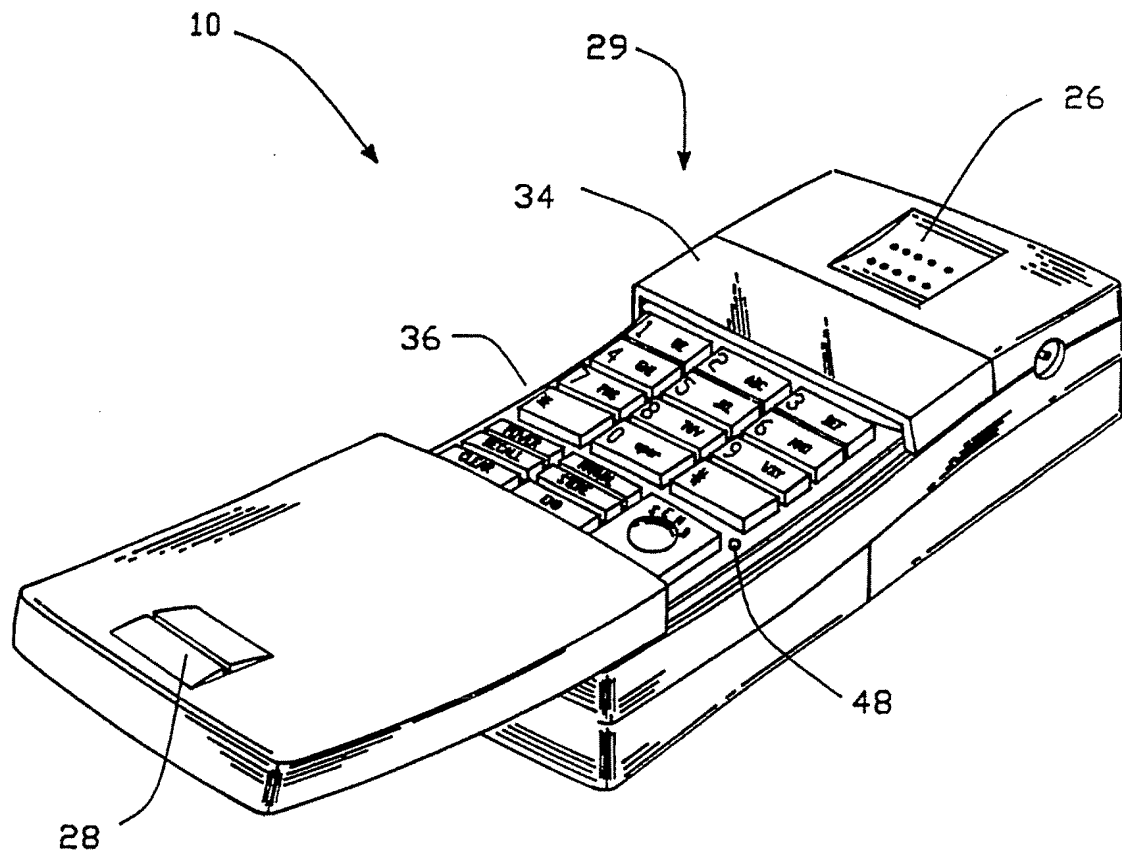


FIG.-2

3/4

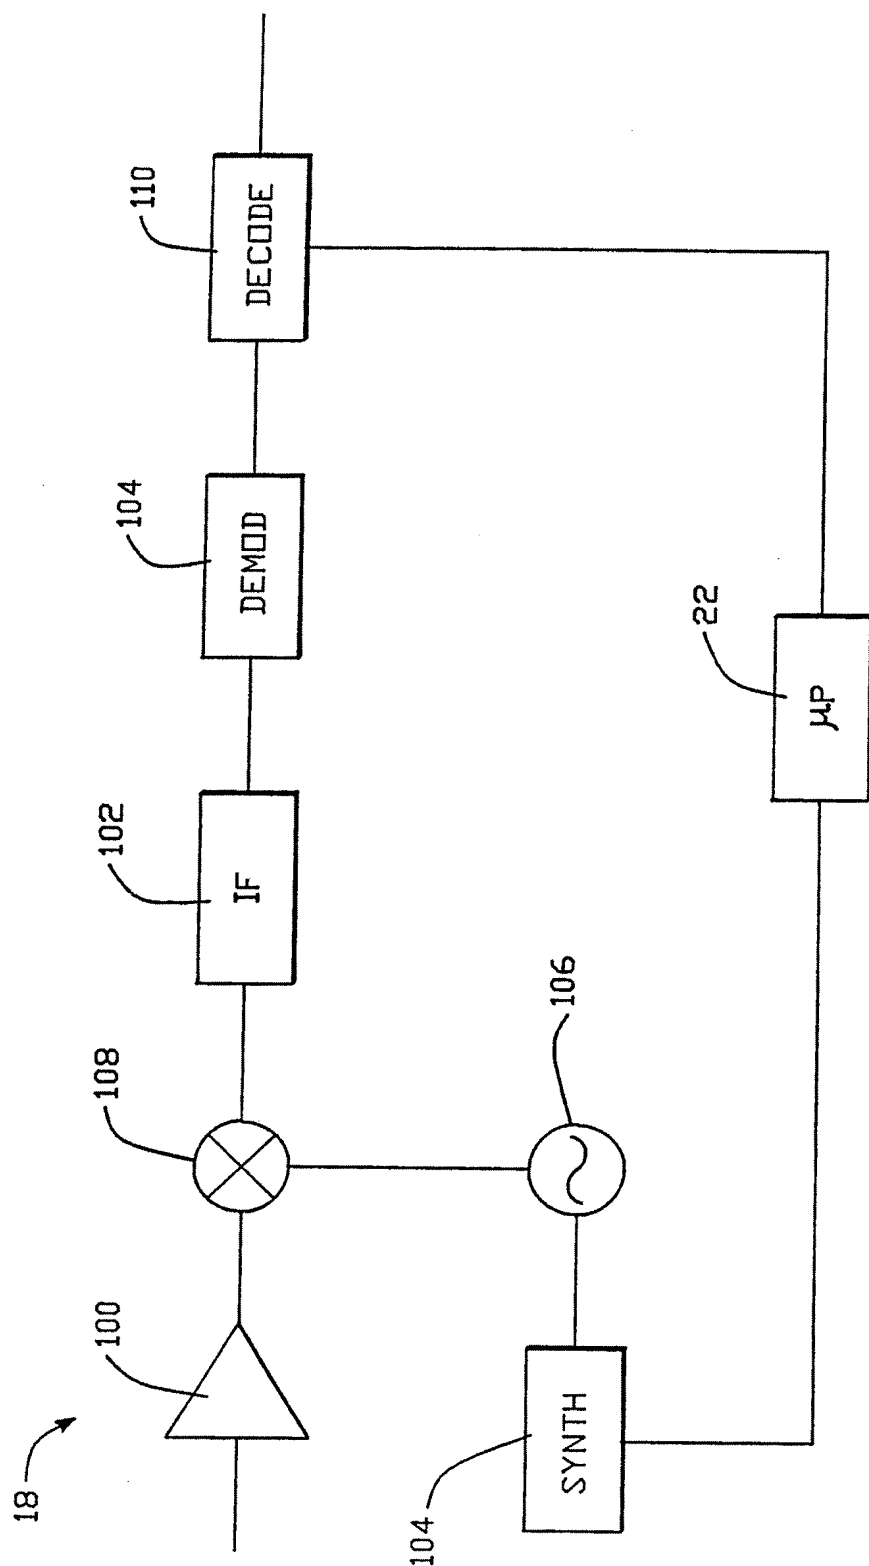


FIG.—3

4/4

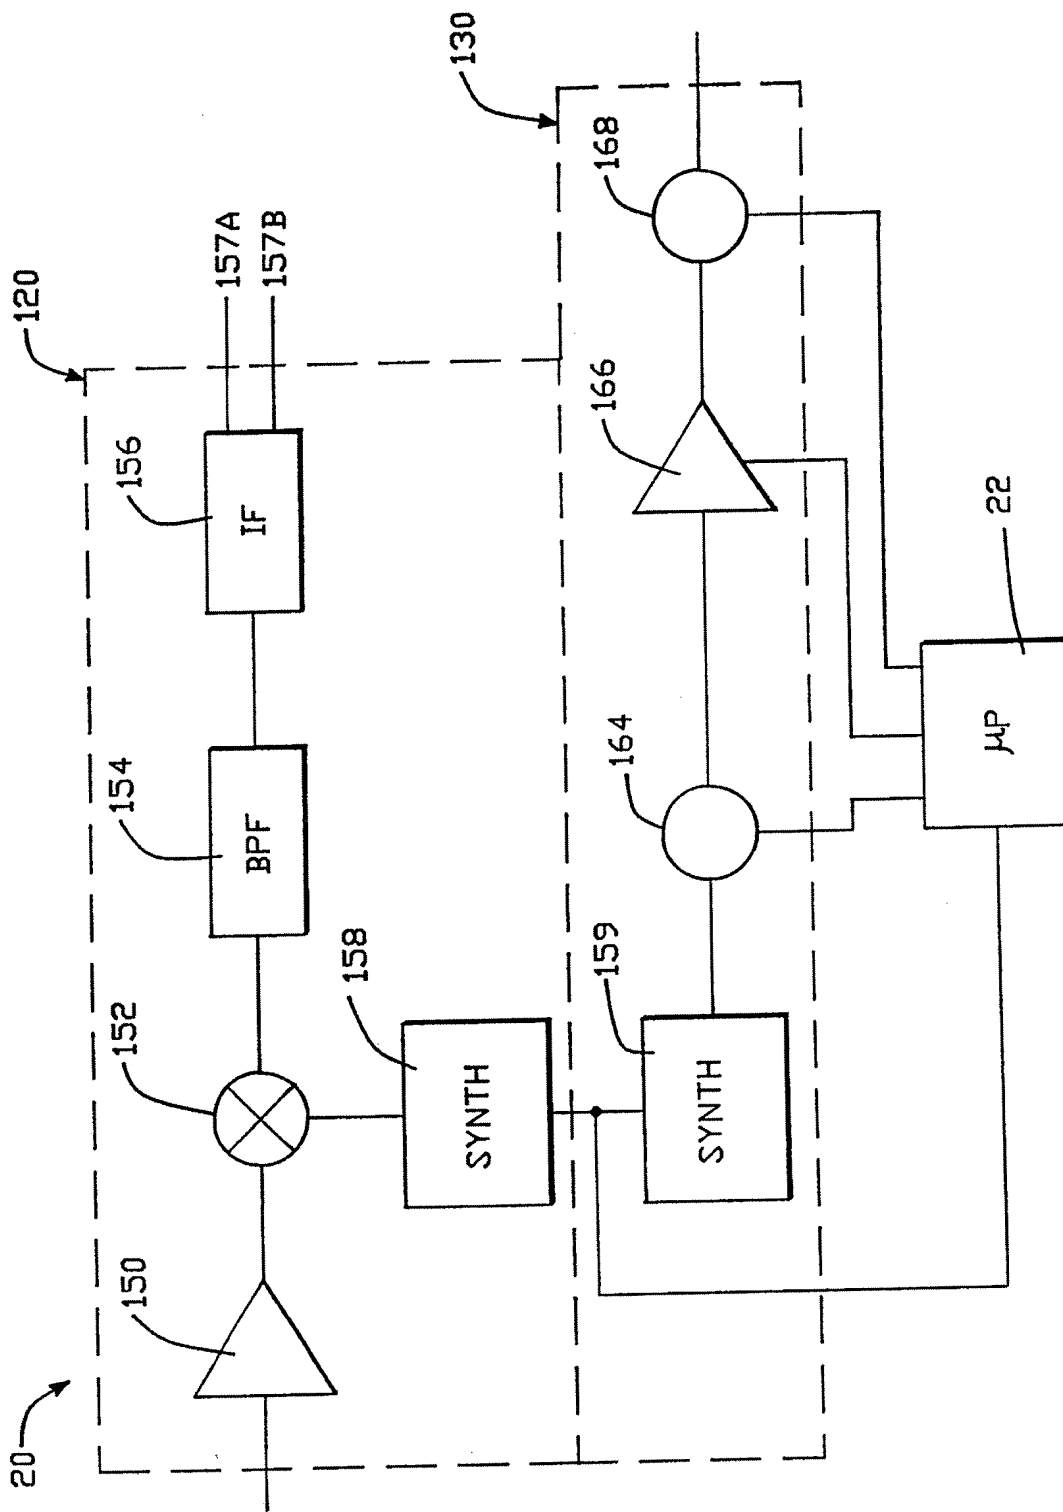


FIG. - 4

# INTERNATIONAL SEARCH REPORT

International Application No. PCT/US91/08517

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup>		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC(5): H04Q 7/00		
U.S. CL: 455/33		
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>7</sup>		
Classification System	Classification Symbols	
U. S.	455/32, 33, 38, 54, 89, 180, 188, 189, 190, 196, 255/258, 349, 351 340/825.44; 379/58, 59, 60	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>9</sup></b>		
Category <sup>*</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
Y	US, A, 4,849,750 (ANDROS ET. AL.) 18 JULY 1989 See Col. 6, lines 15-35	1-10
Y	US, A, 4,644,347 (LUCAS ET. AL.) 17 FEBRUARY 1987 See Col. 8, lines 5-34	1-10
Y	US, A, 4,397,037 (THERIAULT) 02 AUGUST 1983 See Figure	1-10
Y	US, H, H610, (FOCARILE ET. AL.) 07 MARCH 1989 See Abstract.	1-10
A,P	US, A, 5,054,052 (NONAMI) 01 OCTOBER 1991 See Abstract	1-10
<p><sup>*</sup> Special categories of cited documents: <sup>10</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"G" document member of the same patent family</p>		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
05 FEBRUARY 1992	18 MAR 1992	
International Searching Authority	Signature of Authorized Officer	
ISA/US	EDWARD URBAN	